

ELEVATE THE HOME YOU LOVE

Australian made residential and commercial elevators

ORION



ORION

ACCESSIBLE, STYLISH & LUXURIOUS SINCE 1995

The largest lift available from Aussie Lifts, Orion provides a gentle and reliable ride.


With an impressive array of safety features and reduced construction costs, it's ideal for education and community organisations.

With lifts installed in over 5000 locations

Australia-wide, you can be rest assured of the highest quality and guidance every step of the way.

To put your mind at ease, we offer a detailed lift consultancy service to identify and customise the best product fit for you.



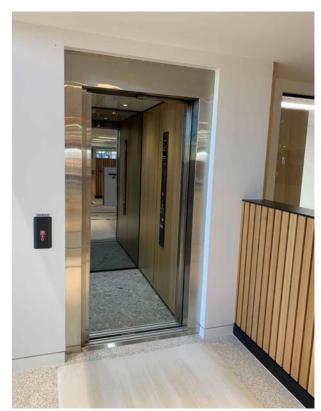





AUSTRALIAN DESIGNED AND MADE

Our low-maintenance lifts are designed and built locally to the highest standards. As one of the few non-importers in the market, every model exceeds Australian Standards (Part 12, 14, 16, 17 and 18) and is BCA compliant (BCA E3.3 & E3.6) for disability access.



FAST AND PROFESSIONAL

An Aussie Lift is manufactured, delivered and installed three times faster than imports.
We can have your product to you from eight weeks, compared to the 26-week turnaround of competitors.



LEADING WARRANTY AND LOCAL SUPPORT

Our quality guarantees are second to none in the industry. If you ever do need replacement parts, they're available right here – minimising downtime and delays, compared to waiting for components from overseas.



COST-EFFECTIVE AND SIMPLE

Every Aussie Lift has low installation, maintenance and running costs – with just annual servicing required. They also don't need load-bearing walls or machine rooms, which makes them suitable for more homes.

06


07

ORION OPTIONS

CHOOSE THE RIGHT ELEMENTS FOR YOUR LIFT

A selection of customisable options are available for the Orion Lift.

Discuss these possibilities with your sales representative.

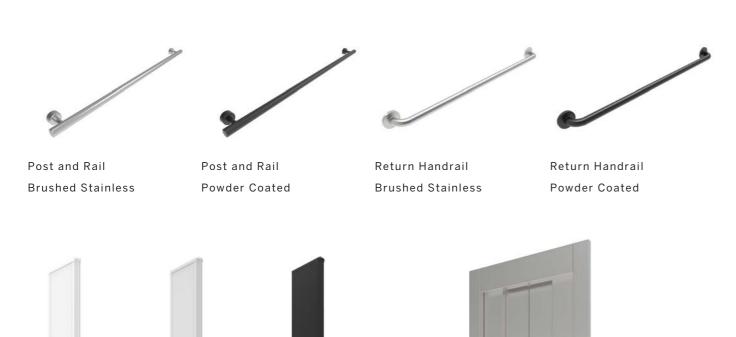



Custom Colours Available

Options available to match colours with doors in your home



Example 1



Example 3



Example 2



Example 4

A wide range of lift car interiors are available to suit your personal requirements, please contact our sales team to discuss the options available

ORION

STANDARD MEASUREMENTS

Weight Capacity: Up to 500kg

Lift Speed: 0.3m/s **Max Travel:** 7.1m


Compliance: AS1735 16, 12.BCA


Application: Internal and External


Control: Automatic operation & key isolation **Power Supply:** Single and Three Phase **Door configurations:** Centre opening

Description	Car Width	Car Depth	Car Height	Door Clear Opening	Structure Width	Structure Depth	Shaft Width	Shaft Depth
Key					Α	В	С	D
Single Entry A Model	1100	1400	2100	900	1690	1790	1740	1840
	1100	1650	2100	900	1690	2040	1740	2090
	1200	1400	2100	900	1790	1790	1840	1840
	1200	2000	2100	900	1790	2390	1840	2440
5 15 1	1100	1400	0100	200	1500	1000	1740	2010
Dual Entry B Model	1100	1400	2100	900	1690	1960	1740	2010
	1100	1650	2100	900	1690	2210	1740	2260
	1200	1400	2100	900	1790	1960	1840	2010
	1200	2000	2100	900	1790	2560	1840	2610

EXAMPLE



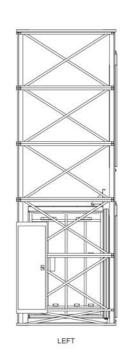

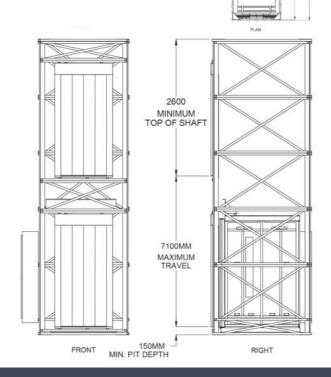

SAFETY FEATURES



Supplied with an impressive list of standard safety features, the Orion offers peace of mind with it's in-car emergency telephone, emergency battery backup lowering system and lighting.

On top of that, the Orion has a very easy to use manual lowering valve, should the lift car ever need to be lowered.

PIECE OF MIND



Manufactured by a family owned and operated company. Australian made to Australian Standards. Built to superior specifications using quality materials. Warranty on parts and labour. Lift delivered, installed & tested by qualified lift technicians. Custom built to your specification. Lift shaft can be finished to match existing architecture. Unrivaled after-sales service.

INSTALLATION



Supplied assembled & pretested, the design of the Orion allows for easy installation by either craning in, dismantling or maneuvering into place.

Able to be installed within 3 - 4 days, the Orion is perfect for new or existing buildings as time on site is minimal.

COST EFFECTIVE



Self-supporting lift tower - no load bearing lift shaft walls required. No separate machine room construction required. Only 150mm pit depth. Low installation / construction costs. Low running costs / power consumption. Bi - Annual maintenance. Suitable for internal or external installation.

MAINTENANCE



For optimum performance, reliability, and long term use, the lift should be serviced every 6 - 12 months by an approved lift technician.

CUSTOMISATIONS



Each lift is custom designed and constructed to your requirements with an impressive list of options available including: Automatic door operators; Voice Control of the lift; Access Control security features; Flood switch sensors for flood zones; and door options to match your existing property.

MAX TRAVEL DISTANCE

7.1 m (4 floors)

DRIVE SYSTEM

Advanced twin synchronous hydraulic cylinders

LIFT SPEED

0.3 m/sec

CAPACITY

Up to 500 kg

PIT REQUIREMENT

150 mm Minimum

INSTALLATION

External or internal applications

DUAL ENTRY

A range of lift car sizes available









CALL US 1800 287 543

EMAIL US

info@aussielifts.com.au